



# SSP80C-8H PAVER



## Powerful

- ◆ The power can satisfy the paver's demands under different working conditions;
- ◆ Low noise, less oil consumption and better machine reliability

## Efficiency

- ◆ Paving capability of over 900 tons per hour.
- ◆ Capable of paving a mat up to 50 cm thick
- ◆ 2 people can finish assembling 9.5m bolt-on screed in 2 hours.

## Economical

- ◆ Conveyor is made of thickened, wear resistant steel plate with a service life in excess of 2000 hours.
- ◆ Designed to endure non-stop paving operations in 50 degree Celsius temperatures.

## Technical specifications


Model	SSP80C-8H
Paving capacity (t/h)	800
Paving width (m)	Hydraulic:8.2
Basic width (m)	Hydraulic: 2.5~4.7
Max. Paving thickness (mm)	350
Working speed (m/min)	1~23
Travel speed (km/h)	0~2.5
Transport size (mm)	Hydraulic: 7250 × 2780 × 3308
Engine brand	SHANGCHAI
Engine model	SC7H210G3
Rated power of engine (kW)	153
Emission standard	CHINA III
Voltage of electric system (V)	24
Gradeability	≥ 20%
Frequency of oscillation (Hz)	0~50(optional)
Hopper capacity (m <sup>3</sup> )	8.5
Heating mode	Electric heated
Camber adjustment range (%)	-1~3
Tamps	1
Amplitude of tamp (mm)	0/2/4/6/8
Frequency of tamp (Hz)	0~25

## Key parts configuration

Model	SSP80C-8H
Sreed	SANY SE47/80 screed
Levelling system	MOBA (control+sensor)
Length of screed(m)	4.7 / 5.2 / 6.2 / 6.7 / 7.7 / 8.2

## Dimensions

Size code	SSP80C-8H
A (mm)	4022
B (mm)	3308
C (mm)	3278
D (° )	14
E (° )	12.5
F (mm)	2600
G (mm)	2040
I (mm)	3660
L (mm)	7250

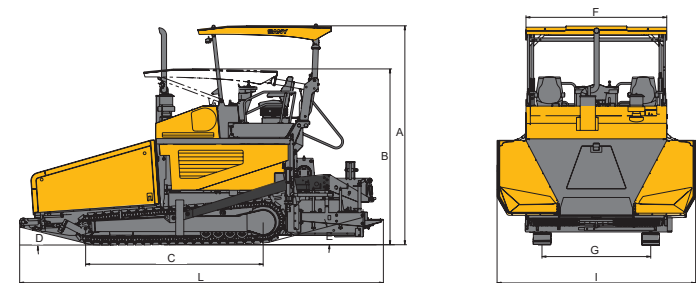

### SANY HEAVY INDUSTRY CO., LTD.

SANY Industrial Park, Economic and Technological Development Zone, Changsha, Hunan, China, 410100  
 Sales Hotline  
 Tel: 0086-731-85835199  
 Mail: sales@sanyglobal.com

Service Hotline  
 Tel: 0086-4006098318  
 Mail: CRD@sany.com.cn

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.

[www.sanyglobal.com](http://www.sanyglobal.com)